Craftbot Plus PRO

QUICK START GUIDE

Thank you for purchasing a CraftUnique product and welcome to the world of 3D crafting! You are just a few steps away from having your first 3D object printed by your brand new Craftbot Plus Pro.
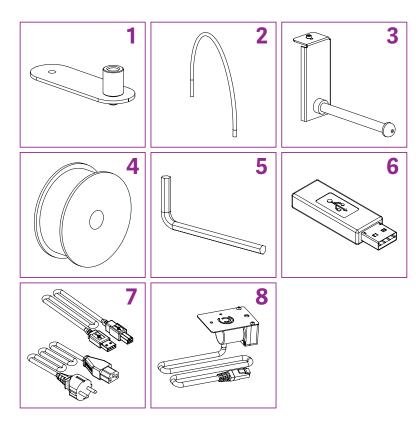
UNPACKING

1. You've already found the Quick Start Guide. Excellent! Now remove the large sheet resting under the foam. Under the sheet you will find your Craftbot Plus Pro attachable accessories in a cardboard cradle resting in the cavity of the Craftbot Plus Pro 3D printer.

2. Remove this cradle from the box with care and place it in a safe out-of-the-way place.

3. The printer is wrapped in a tight fitting plastic protective cover. Open up the covering. Firmly grasp the frame of the Craftbot Plus Pro and lift it out of the box without touching the fragile inner parts. Craftbot Plus Pro weights 14 kg (almost 31 lbs) – seek assistance if needed!

4. Place the printer on a stable and level surface with sufficient space around.

CONTENTS OF THE BOX

It's time to unpack additional parts. Below you can see the contents of the box. First of all, check the list to make sure nothing is missing!

1. Filament guide tube holder
2. Filament guide tube
3. Filament spool holder
4. Filament spool
5. Hex wrenches (5x)
6. USB Flash storage
7. USB A-B cable and AC power cable
8. Filament monitoring system (FMS)*

*FMS - The Filament monitoring system is optional, not included in the basic set.

1. Install the filament guide tube holder/FMS *

Use a hex wrench to install the guide tube holder/ FMS* onto the top of the Craftbot Plus Pro. Keep in mind that the spool holder must be installed directly next to it. (Connect the FMS to the machine*)

2. Install the filament guide tube

One end goes into the guide tube holder/FMS. Push the other end into the hole on the top of the extruder.

3. Install the filament spool holder

Use a hex wrench to install it somewhere close to the filament guide tube holder. (Keep in mind leave some space for FMS* connector.)

4. Mount the filament spool

Now get the spool from the box containing the PLA filament. Fit the spool onto its holder so that the lead end keeps its course when the filament is fed into the guide tube holder.

5. Attach the power cord

Ensure that the power switch on the back of the Craftbot Plus Pro is set to the OFF position. Insert the AC power cord into the power input (on the back) and switch ON your 3D printer!power input on the back of the Craftbot. Switch ON your 3D Printer.

WARNING!

For safety reasons please read the User Manual before using Craftbot for the first time. You can find it on the enclosed pendrive or you can download it from www.craftbot.com.

Videos worth watching:

www.craftbot.com/craftbotpluspro-intro